



- ROLO – Per IPC-J-STD-004
- Bellcore GR-78-CORE Compliant
- Halogen-Free–No Hidden Halides
- Pin probable residues

NC670 No Clean Solder Paste

INTRODUCTION

NC670 No Clean Solder Paste is a new generation halide-free, rosin-based chemistry designed to provide a previously unseen level of repeatability and consistency to the printing process. This paste offers an excellent open time, extended abandon time and good soldering activity with all surface finishes. **NC670** meets or exceeds the requirements for ANSI/J-STD -004, -005 as well as all Bellcore test criteria for solder pastes. Residues left behind are clear and maintain a virtually indefinite pin probability life.

ATTRIBUTES

- Excellent print consistency with Surface Area Ratios (SAR) as low as 0.55 when combined with the latest stencil technology
- No Hidden Halides - Completely halogen free by all test standards
- Non-hygroscopic formulation suitable for high RH areas.
- Wide reflow window with good solderability on various PCB surface finishes
- Unlimited pin probability and clear post-process residues
- Low voiding/high reliability composition
- Compatible in either Nitrogen or Air reflow

PRODUCT INFORMATION

Alloys:	<ul style="list-style-type: none"> • SN63 – MP=183°C • 62/36/2 – MP=179°C
Applications:	<ul style="list-style-type: none"> • Automatic / Manual Printing • Automatic / Manual Dispensing
Powder Size:	<ul style="list-style-type: none"> • Type-3 and Type-4 standard • Type-5 available upon request
Packaging:	<ul style="list-style-type: none"> • 500gram jars or cartridges standard • Enclosed print head systems. • Other packaging upon request
Repair Flux:	<ul style="list-style-type: none"> • 10CC and 30CC syringes • Larger package sizes upon request

PRINTING

Stencil aperture design and stencil quality are major factors in achieving excellent print consistency with any solder paste.

High quality stencils are recommended for optimal print performance. Some general stencil aperture design guidelines follow:

- **Fine pitch components (≤ 0.020")**
A 0.001" reduction (L & W) to minimize bridging and create proper gasketing between the stencil and SMT pad
- **Discrete components**
A 0.002" reduction (L & W) for water washable and a 0.002" reduction (L & W), with "U-shaped" home-plates, for no clean to minimize mid-chip solder beads.

Contact FCT Solder for process-specific stencil design recommendations. www.fctsolder.com

PRINTER OPERATION

The following are general recommendations for stencil printer optimization. Further adjustments may be necessary based on specific process requirements.

Solder Paste Bead Size:	<ul style="list-style-type: none"> • 2cm (~0.75") on startup • Add when bead < 1.4 cm (~0.5") <p>Maintaining a minimal controlled volume of solder paste on the stencil at all times will ensure paste consistency as well as print process repeatability and reliability</p>
Squeegee:	<ul style="list-style-type: none"> • Metal, Slic™ blade preferred • 60 degrees from horizontal
Speed:	<ul style="list-style-type: none"> • 25 to 150 mm/sec. (1 to 6 in/sec) <p>Adjust printer for a pull or print-on-demand process</p>
Pressure:	<ul style="list-style-type: none"> • 0.18-0.27 Kg/cm (squeegee length) <p>Apply only enough pressure to achieve a clean top-side wipe of the stencil surface after each squeegee pass</p>
Underside Wipe:	<ul style="list-style-type: none"> • A quality stencil should exceed >10 prints/wipe
Stencil life / Environment:	<ul style="list-style-type: none"> • >8 hours • 30+60% RH and 20°C-25°C


STORAGE AND HANDLING

- Cartridges should be stored tip down.
- Paste can be stored up to two weeks at room temperature.
- To prolong the shelf life of **NC670**, refrigerate between 5°C~10°C, (41°F~50°F). At this range the shelf life will exceed 8 months.
- **NC670** should not be allowed to freeze.
- When refrigerated, solder paste must be allowed to warm up to room temperature.
- Paste must be ≥22°C, (~66°F) prior to applying to stencil for processing.
- Working range of **NC670** is between 22-32°C, (~66°F – 89.5°F).
- First-In-First-Out (FIFO) inventory management practices should be used with all solder pastes.





REFLOW PROFILE

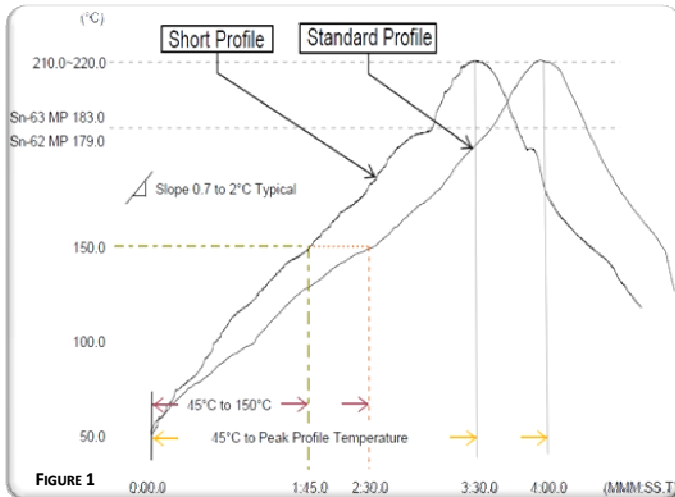

HEATING

A linear ramp of 0.7°C to 2.0°C C/second is suggested to gradually remove the solvents and other volatile components in the solder paste. This also helps in minimizing solder balls, beading and bridging from hot slump.

A linear ramp also helps minimize depletion of flux activity which can occur with excessive temperature, and at extended preheat times, and at very high reflow temperatures.

A profile with a soak between 200-210°C for less than 20 seconds can be used to reduce void formation on BGA and CSP devices. (Request FCT Solder’s profile guide to void reduction).

While a linear profile typically does not produce tombstoning, a short 10-20 second dwell prior to transitioning into the liquidus point of the solder, and minimizing the ΔT between soak and liquid temperatures will help minimize tombstoning if experienced.

STANDARD LINEAR PROFILE GUIDELINES

A linear ramp-style profile (Figure 1) is recommended with **NC670**; however, it will also perform well in ramp-soak profiles. Some general guidelines for a standard linear profile:

Standard Linear Profile	
Ramp Rate	• 0.7°C ~ 2.0°C Per Second Typical
Time Above Liquidus (TAL)	• 60 Seconds Nominal • 45~75 Sec. Process Window
Peak Temperature	• 215°C Nominal • 210°C~220°C Process Window
Profile Length	• 3½ ~ 4 Minutes Max • From 45°C to Profile Peak
Cool Down	• 2.0°C ~ 3.0°C Per Second Typical

HIGH TEMPERATURE PROFILE

When Soldering to Au, Pt, Pd, Alloy 42 and Thermally Demanding Assemblies	
Time Above Liquidus (TAL)	• 75~90 Seconds
Peak Temperature	• 225°C ~ 230°C
Profile Length	• 4 ~ 4 ½ Minutes Max • From 45°C to Profile Peak
Cool Down	• 2.0°C ~ 3.0°C Per Second Typical

Soldering hard-to-wet alloys such as Au, Pt, Pd, Alloy 42 leadframe, and heavier OSP coatings can be easily achieved through slight modification of Peak, TAL and Profile Length parameters to overcome secondary eutectic, and lower dissolution rates associated with these alloys.

Densely populated, high layer count, and otherwise thermally demanding PWB’s will also typically require, and benefit from these suggested process adjustments.

Request FCT Solder’s process bulletin for soldering high-temp alloys

COOLING

A cooling rate of 2°C-3°C per second is typical for most Sn62 and Sn63 applications. These parameters should be utilized to insure a fine grain solder structure and minimal IMC layer.

MATERIAL SAFETY DATA SHEETS

Material Safety Data Sheets (MSDS) are available upon request, and online at www.fctsolder.com

TEST RESULTS

J-STD-004 (IPC Tm-650) Test	Result
Flux Type (per J-STD-004)	ROLO
Copper Mirror	Low
Halide test	0%
Silver Chromate	Pass
Fluoride test	Zero
Ion Chromatography	Zero
SIR-Surface Insulation Resistance	Pass
J-STD-005 (IPC-TM-650) Test	Result
Brookfield viscosity Type 3	750,000
Brookfield viscosity Type 4	800,000
Slump	Pass
Solder Ball	Pass
Wetting	Pass
Bellcore Test	Result
SIR-Surface Insulation Resistance	Pass
Electromigration	Pass

